



# Hydraulic Power Unit 2-Stage Braking




## WHERE TO USE

The 2-stage hydraulic power unit provide a 2-stage controlled braking sequence for use with hydraulic fail-safe spring applied disc brakes. The 2-stage braking sequence is used to prevent a hard braking sequence, which in worst case can cause too high stress on the mechanical parts, or unwanted wear of the system through uncontrolled braking.

## BRAKING PERFORMANCE

During opening of the brakes the pressure is build up and thereby opening the brake(s). The first stage of the braking sequence is dumping the pressure to the correct pressure and after the 2-stage braking time the pressure is smoothly reduced and thereby increasing the braking torque.

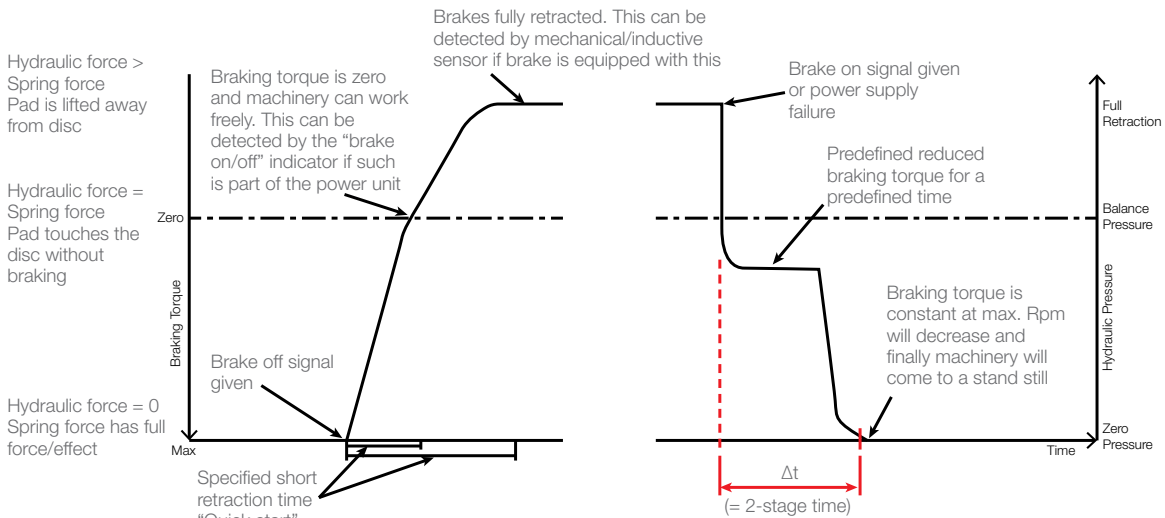

## FUNCTIONAL DESCRIPTION

### Operation (Not Braking)

Electrical power is connected to the electrical motor and the solenoid valve(s) is/are energized. The braking valve(s) is/are closed and block the connection to tank. The hydraulic pressure is built up and disengages the brake and charges the accumulator.

The electrical power is disconnected from the motor by means of the motor pressure switch. The braking valve(s) is/are constantly energized. If the pressure is decreasing to the lower set point for motor pressure switch the motor will restart and increase the pressure again.

### Applying the Brake with Controlled Braking Torque

The electrical power is disconnected to the braking valve(s) and motor. The hydraulic oil pressure is released to the tank through the counter pressure valve(s) and the throttle valve(s), resulting in a constant reduced braking torque (MT%).

The reduced braking time is set by the flow control valve by bleeding the oil from the accumulator slowly through the flow control valve, maintaining a constant pressure in the brakes. When the accumulator is fully discharged the pressure in the brake will go to zero, and full braking torque is applied.

The constant brake torque and braking time is pre-set from factory as specified or if not specified set to 50% (MT%) of maximum torque and approximately 10sec stopping time ( $\Delta t$ ).

### Operation in Case of Power Failure

In case of power failure the brakes will be applied as described in the section: Applying the brake with controlled braking torque.



## FEATURES

The hydraulic power unit is available in two versions; a basic (single dump) and a premium (dual dump) with cabinet / enclosure with various options and accessories.

The junction box / terminal box is mounted internally in the upper left hand side. Cable entry is in left hand side with removable entry plate in brass. The cabinet door is hinged either left hand or right hand side. The pressure connection / bulkhead (JIC as standard / Ermeto fitting 10L as optional) is mounted in left hand side but can be mounted in the right hand side or in the bottom as well.

### 2-Stage Braking Special Features

- Single return line / dump (Basic) or Dual return lines / dump for redundancy (Premium)
- Counter pressure valve(s) and throttle valve(s)
- Equipped with hand pump for manual release of brake
- Inline high pressure filter
- LED's on solenoids
- Test point for readout / bleeding of manifold
- Pressure switch either electronic or mechanical type
- Level & temperature switch in tank
- Pressure gauge mounted on test point (minimess) hose inside cabinet
- Stainless steel enclosure mounted on bracket with vibration dampers
- Enclosure door with cam lock with double bit as standard or upgraded with stainless pad-lockable swing handle (optional)
- Removable drip tray to capture spills
- HPU can be mounted on slides for easy maintenance (optional)
- Sun roof / dirt cover 30° (optional)




## HYDRAULIC DIAGRAM

The schematics illustrates the difference between basic (single return) & premium (double return). The additional circuit on the premium version is marked with red in the below image.


The motor pressure switch can either be mechanical type (2 switches) or electronic type (IFM) (1 switch) – here shown as electronic type.

### Basic Version: Single Dump / Single Return Line

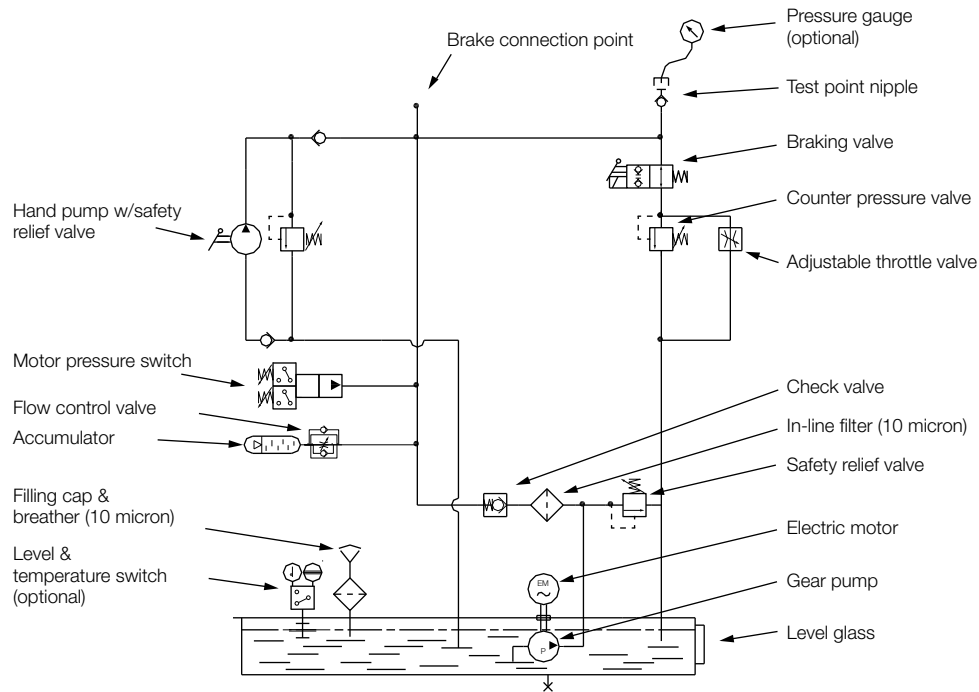

### Premium Version: Double Dump / Dual Return Line

Red area indicates additional circuit for redundant return/dump

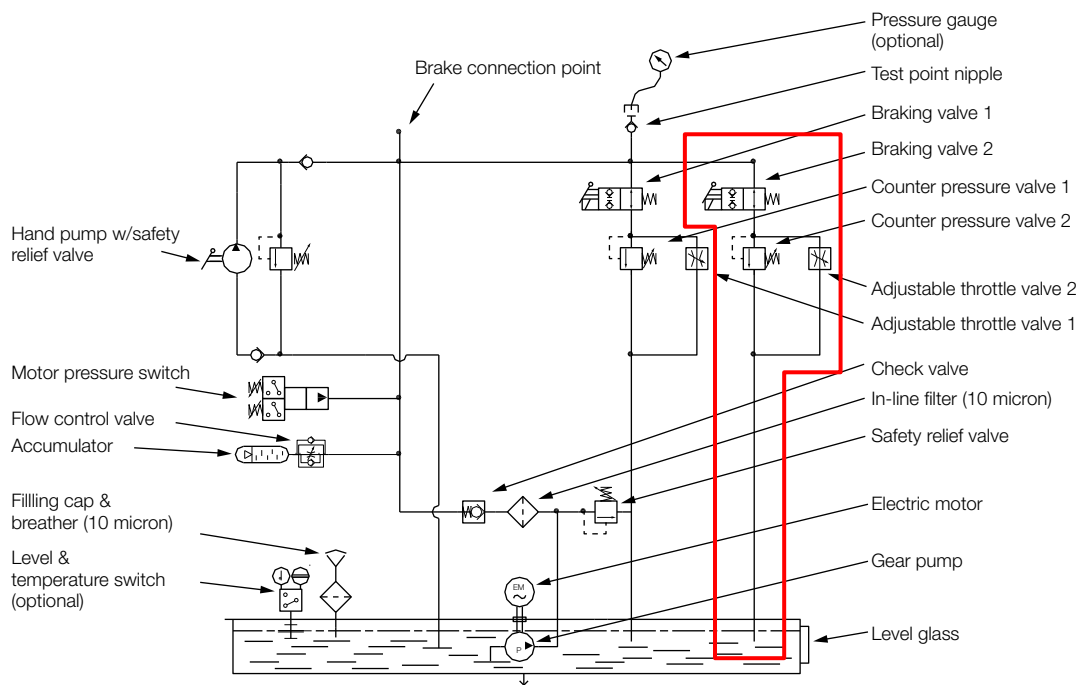

## ELECTRICAL DIAGRAM / SCHEMATIC


The electrical components on the hydraulic power unit – excluding the motor - are prewired to the junction box.

The motor supply wire and motor starter is not part of the unit and must be provided locally.


The connection from installation to junction box and motor is to be made through the removable brass entry plate in the left hand side and must be made during installation. It is not normal to connect the brake indicators through the junction box on the unit.

The electrical diagram / schematic vary according to the selections made (basic / premium / mechanical or electronic pressure switch) – below two typical schematics

### Premium Version (Redundant Valves) with IFM Pressure Switch:

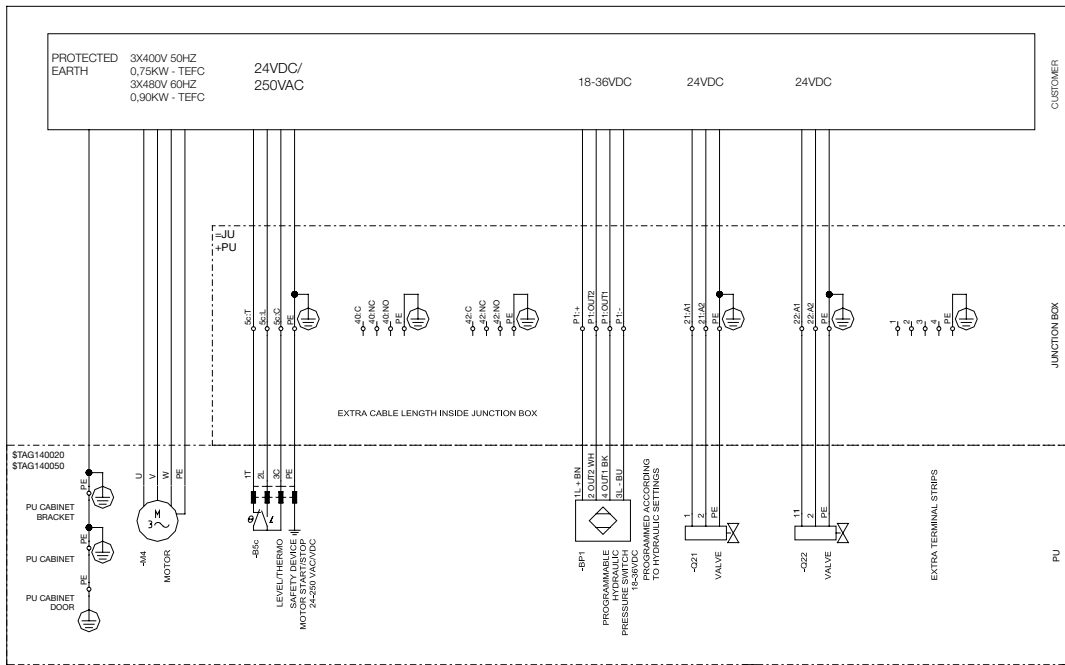

### Premium Version (Redundant Valves) with Mechanical Pressure Switch:

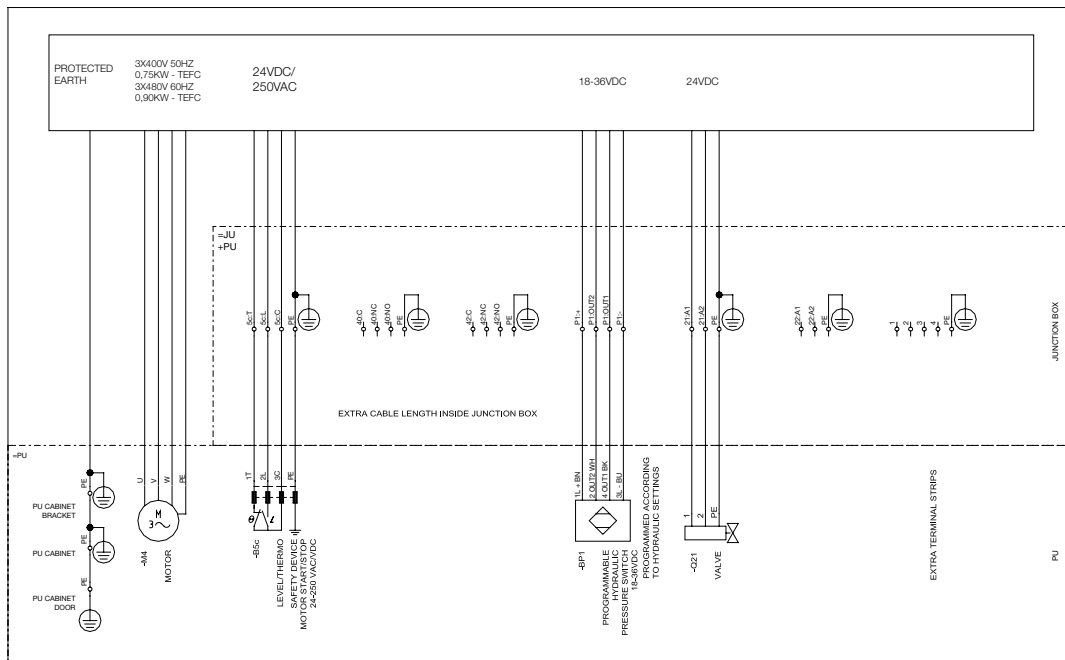

**Component List** (Quantities depend on configuration)


Valves / Coil	Directional poppet valve 2/2 & coil 21W (1x or 2x) - Hydac	
Pressure switch	Electronic sensor (1x) – IFM 7001 Mechanical pressure switch (2x) - Bosch Rexroth HED5	
Level & temperature switch	Level indicator with temperature switch 70°C - Lund & Sorensen	
Motor	IEC common motor 0,75kW for 50Hz / 0,90kW for 60Hz	
Terminals (in JB)	Screw terminals - Wago	
Wire colors	IEC Power circuit wiring colors Protective earth (PE) Green-yellow Neutral (N) Blue Line, single phase (L) Brown Line, 3 phase (L1) Brown Line, 3 phase (L2) Black Line, 3 phase (L3) Grey	

**Recommended Brake Limits for 2 Stage Pressures**


Choosing brake torques and brake sizes that result in a hydraulic two stage pressure lower than 10bar (lower limit) is not recommended as the counter pressure valve is very difficult to set at this low pressure.

The brake pressure curves indicate the two stage pressure at the corresponding torque. If pressure is below the 'lower limit' the combination is not recommended.


**BSFI 200 Series:**

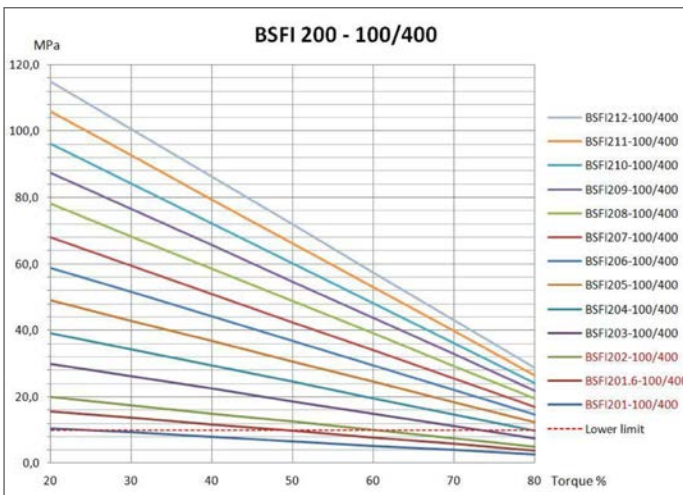

**BSFI 300 Series:**

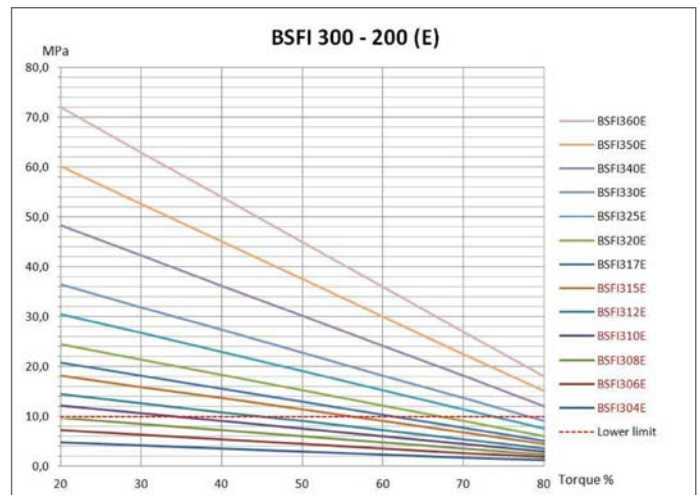


**BSFI 3000 Series:**

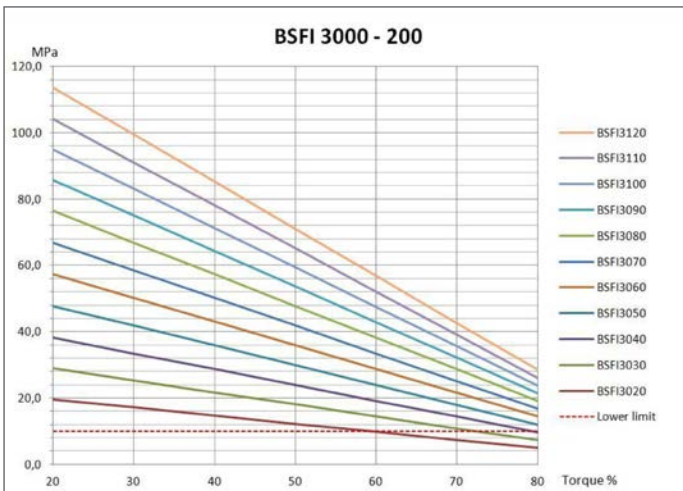

## SELECTION SHEET – 2 STAGE HYDRAULIC POWER UNIT

Dimensions (600x800x400mm) (WxHxD)

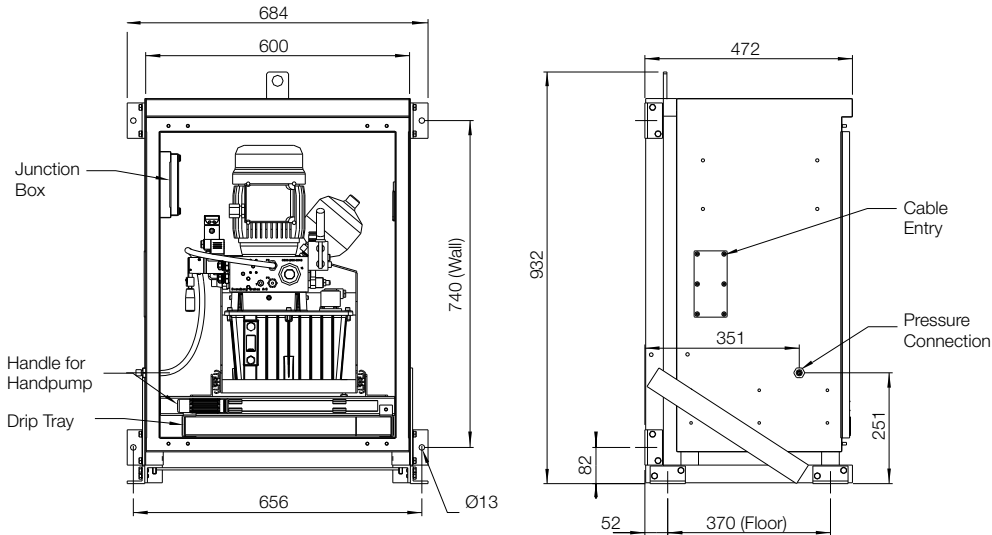

### Technical Specifications

#### Motor standard

IEC – TEFC (fan cooled)  
IEC – TENV (non ventilated)

#### Available motor voltages

AC 50Hz / 60 Hz  
1 x 230V  
3 x 400V / 480V  
3 x 500V / 575V  
3 x 690V / 690V

All AC motors have voltage tolerance  $\pm 10\%$   
Power consumption:  
0.75kW (50Hz)  
0.90KW (60Hz)

#### Available Coil Voltages

DC: 12V, 24V, 48V, 110V  
AC: 110V, 230V

Power consumption: 19W (one coil)

#### Oil Tank Size

6 liter / 1.58 gallon (US) /  
1.32 gallon (imperial)

#### Hand Pump

Inclusive

#### Pressure Switch

Electronic or Mechanical

#### Cabinet / Enclosure

Stainless steel (1.4305 /  
AISI 304) incl. junction box

Protection class IP66

Protection class for electrical components IP55

Internal wiring according to IEC EN 60204-1

Mounted on suspension bracket with dampers and lifting point.  
Drip tray to take spills.  
Slides for easy maintenance (optional).

#### Ambient Temperature Limits

-20°C to +50°C /  
-4°F to +122°F  
The hydraulic fluid must match temperature level

#### Altitude

Below 1000 MASL

#### Weight

Approx.: 100kg / 220lb  
(without oil)

### HPU Selection Sheet

<b>Version (select one)</b> Premium (dual return) Basic (single return)		<b>Accessories (select one)</b> Unit mounted on slides (default) Unit fixed on bracket	
<b>Motor (AC 50 Hz/60Hz)</b> TEFC =Fan cooled TENC = Non Ventilated	<b>(Select one)</b>	<b>Door mounting (select one)</b>	
	TENV    TEFC	Left side mounted (default) Right side mounted	
	1x230V 50 Hz / 1x230V 60 Hz	-	<b>Cabinet accessories</b> Cam lock with double bit (default) Pad-Lockable swing handle
	3x400V 50 Hz / 3x480V 60 Hz	-	
3x500V 50 Hz / 3x575V 60 Hz	-		
3x690V 50 Hz / 6x690V 60 Hz	-	<b>Flat cabinet (no sun roof)(default)</b> <b>Dust cover / sun roof 30°</b>	
<b>Coil voltage (select one)</b>	AC    DC	<b>Pressure connection entry (select one)</b>	
12 VDC	-	Left side mounted (default) Right side mounted Bottom (left) mounted	
24 VDC	-		
48 VAC / VDC			
110 VAC	-		
230 VAC	-		
<b>Pressure switch (select one)</b>		<b>Pressure connection type (select one)</b>	
Electrical (IFM) (Port P1)		JIC connection (default) Ermeto connection (10L)	
Mechanical (Port 40 & 42)			
<b>Hydraulic / brake parameters:</b>			
Brake series / size: _____			
Type of brake (Mono / Dual) _____			
Number of brakes: _____ pcs			
Braking torque $M_r$ % (30-70%): (% of 100% torque) _____ %			
Braking time $\Delta t$ (5-25sec): (2-stage time) _____ Sec			
Standard (if no values given): $M_r$ % =50% & $\Delta t$ =10 sec			
Customer Name / Project: _____			
Other Information: _____			
Name & Date: _____			

## Svendborg Brakes Facilities

### Europe

Jernbanevej 9  
DK-5882 Vejstrup - Denmark  
+45 63 255 255  
sb@svendborg-brakes.com  
*Industrial Brakes and  
Brake Systems*

### Global Representations

**Australia**  
Svendborg Brakes Australia Pty., Ltd.  
Perth  
+61 (0) 8 94 160300

Svendborg Brakes Australia Pty., Ltd.  
Newcastle  
+61 (0) 8 94 160300

Svendborg Brakes Australia Pty., Ltd.  
Brisbane  
+61 (0) 8 94 160300

**Brazil**  
Altra Industrial Motion Brazil  
+55 11 4615-6300 /  
+55 11 5679-6553

**Chile**  
Svendborg Brakes Chile  
Coquimbo  
+56 23 203 9150

Svendborg Brakes Chile  
Santiago  
+56 23 203 9150

### China

Svendborg Brakes Shanghai Co., Ltd.  
+86 21 50311060

### Czech Republic

Svendborg Brakes Czech Republic  
+420 (251) 6801 68

### Denmark

Svendborg Brakes ApS  
+45 63 255 255

### Germany

Svendborg Brakes ApS  
+49 5422 9272 00

### India

Svendborg Brakes India  
sb@svendborg-brakes.com

### Korea

Svendborg Brakes, Korea Co., Ltd.  
+82 10 9703 0979

### Poland

Svendborg Brakes Poland  
+48 (322) 1150 40

### South Africa

Altra Industrial Motion South Africa  
+27 (0) 11 918-4270

### Spain

Svendborg Brakes  
+34 (975) 2336 55

### USA

Svendborg Brakes, USA LLC  
+1 (303) 285 1271

## The Brands of Altra Industrial Motion

### Couplings

**Ameridrives**  
www.ameridrives.com

**Bibby Turboflex**  
www.bibbyturboflex.com

**Guardian Couplings**  
www.guardiancouplings.com

**Huco**  
www.huco.com

**Lamiflex Couplings**  
www.lamiflexcouplings.com

**Stromag**  
www.stromag.com

**TB Wood's**  
www.tbwoods.com

### Geared Cam Limit Switches

**Stromag**  
www.stromag.com

### Electric Clutches & Brakes

**Inertia Dynamics**  
www.idicb.com

**Matrix**  
www.matrix-international.com

**Stromag**  
www.stromag.com

**Warner Electric**  
www.warnerelectric.com

### Linear Products

**Warner Linear**  
www.warnerlinear.com

### Engineered Bearing Assemblies

**Kilian**  
www.kilianbearings.com

### Heavy Duty Clutches & Brakes

**Industrial Clutch**  
www.indclutch.com

**Twiflex**  
www.twiflex.com

**Stromag**  
www.stromag.com

**Svendborg Brakes**  
www.svendborg-brakes.com

**Wichita Clutch**  
www.wichitaclutch.com

### Belted Drives

**TB Wood's**  
www.tbwoods.com

### Gearing

**Bauer Gear Motor**  
www.bauergears.com

**Boston Gear**  
www.bostongear.com

**Delroyd Worm Gear**  
www.delroyd.com

**Nuttall Gear**  
www.nuttallgear.com

### Overrunning Clutches

**Formsprag Clutch**  
www.formsprag.com

**Marland Clutch**  
www.marland.com

**Stieber Clutch**  
www.stieberclutch.com

Neither the accuracy nor completeness of the information contained in this publication is guaranteed by the company and may be subject to change in its sole discretion. The operating and performance characteristics of these products may vary depending on the application, installation, operating conditions and environmental factors. The company's terms and conditions of sale can be viewed at <http://www.altramotion.com/terms-and-conditions/sales-terms-and-conditions>. These terms and conditions apply to any person who may buy, acquire or use a product referred to herein, including any person who buys from a licensed distributor of these branded products.

©2017 by Svendborg Brakes LLC. All rights reserved. All trademarks in this publication are the sole and exclusive property of Svendborg Brakes LLC or one of its affiliated companies.

